

# Mackworth

## TX440/660 Ceiling Lift



### **The TX440/660 lift is a lifting aid used by health care professionals to transfer clients.**

The lift makes it possible to move mobility impaired individuals with minimal strain or risk to the caregiver, while providing complete safety, dignity and comfort for the client.

The TX range of ceiling lifts should be used in conjunction with a suitable fixed ceiling track system and a moving and handling sling.

The sling should be selected to suit the application and client requirements. It attaches to the lift by means of the carry bar by its straps to hold the individual while the lift, or transfer takes place.


### **Features and benefits**

- Low profile ceiling lift with 2000mm lifting range
- Powered traverse option available
- Smooth running lifting tape and high torque motor
- In-track charging point
- Capable of transferring patient of up to 440lb (200kg) or 660lb (300kg)
- Unobtrusive, doesn't take up floor space or cause trip hazards
- Ideal for use in wet rooms and bathrooms
- QRS carry bar

# TX440/660 Ceiling Lift

## Technical specifications

Max Safe Working Load	440lb (200kg)
Hoist Case	Non Flammable ABS Plastic
Length	xx.xx" (340mm)
Width	xx.xx" (xxxmm)
Height	xx.xx" (146mm)
Weight (Hoist only)	x.xlb (10kg)
Hosting Range	Up to xx.xx" (2000mm)
Lifting Speed (unloaded)	1.38"/s (35mm/s)
Lifting Speed (xxxlb loaded)	0.98"/s (25mm/s)
Charger Input	100-240V AC-50/60Hz/1.5A
Charger Output	24 VDC/1.0A
Hand Control	Pneumatic
Batteries	2 x 12 VDC 5.0 AH, Sealed Lead Acid
In Track Charging	Yes
Removable from Track	No
Duty Cycle	15% use, 85% rest

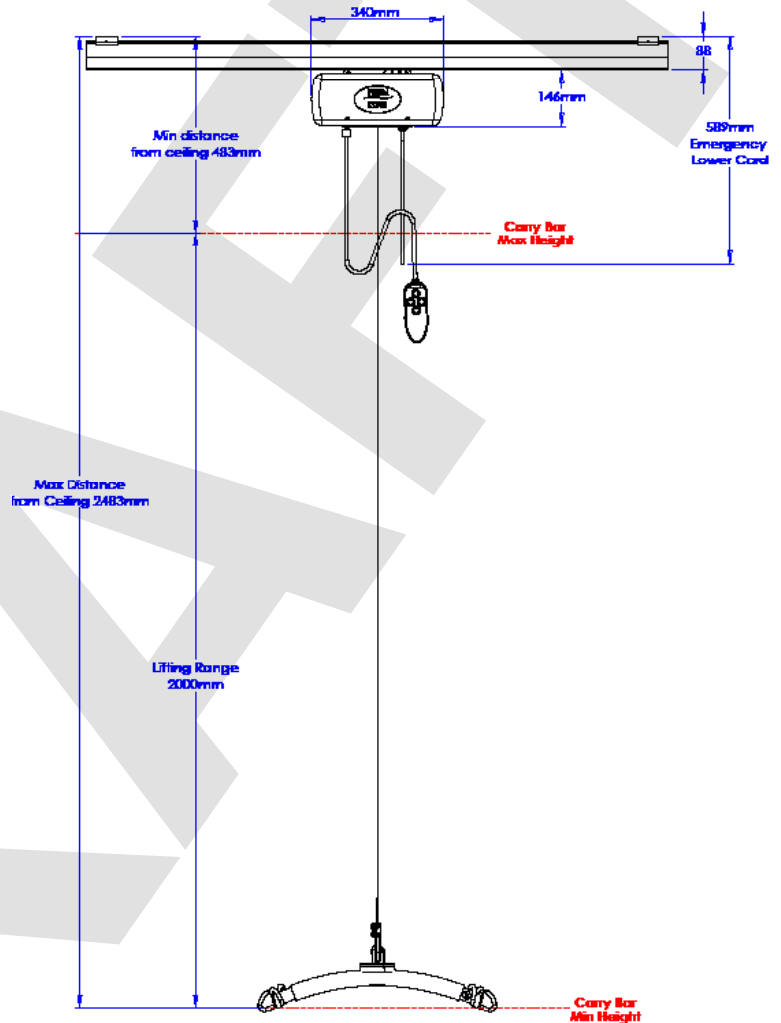

Product Number: 998XXX Rev. DRAFT/ Date: 07/01/2020

Mackworth

t: XXX-XXX-XXXX

Nia eum endi aborrum rae. Itatis pro voluptatur aut erum nos di  
cus nosaest elit recabores accat endae