

GoLift Specifications



Product Features:

- Capacitive Touch Hand Control
- Quick Connect Carry Bar
- Quick Connect Hand Control
- Light Weight and Portable
- LED Indicators
- Infection Control
- Durable and Strong
- Easy to Service

Safety Features:

- Emergency Stop
- Emergency Lowering Device
- Upper Limit Detection
- Lower Limit Detection
- Slack Tape Sensor
- Free Fall Brake (over speed governor)
- Low Battery and Dead Battery Alarms
- Soft Start and Stop
- Overload Protection
- Emergency Manual Lowering

Single Lift
GO-LFT-400



Lifts up to 400 lbs / 181 kg



Single Lift
GO-LFT-700



Lifts up to 700 lbs / 318 kg



Tandem Lift
GO-LFT-1000



Lifts up to 400 lbs / 181 kg






Specifications:

<p>Safe Working Load (SWL) 400 lbs / 181 kg 700 lbs / 318 kg 1000 lbs / 454 kg</p> <p>Unit Weight 400 lb / 181 kg version: 8 lbs / 4 kg 700 lb / 318 kg version: 10 lbs / 5 kg 1000 lb / 454 kg version: 20 lbs / 9 kg (<i>Tandem Lifts</i>)</p> <p>Lift Case Flame retardant ABS</p> <p>Approvals Certified to: Can/CSA-C22.2 No 60601-1:08, UL 60601-1:08 Tested to: ISO 10535-06, CE</p>	<p>Capacitive Touch Hand Control Protection Class: IPX4</p> <p>Service Life 10 years or 22,500 cycles</p> <p>Maximum Sound Level <55 dB</p> <p>Maximum Lifting Speed No load: 2 inches/second 150 lbs / 68 kg: 1.3 inches/second 400 lbs / 181 kg: 1 inch/second 700 lbs / 318 kg: 1 inch/second 1000 lbs / 454 kg: 1 inch/second</p>	<p>Batteries High Capacity, Nickel Metal Hydride (Ni-Mh) Standard: 2x 14.4V (3.3Ah) Optional: 2x 14.4V (5Ah)</p> <p>Battery Charger Input: 100-240V AC Output: 36V DC 1.0A 40W</p> <p>Number of Lifts Per Charge (Duty: 10/90) 25% of strap at midrange¹:</p> <ul style="list-style-type: none"> • 375 with 185 lbs / 84 kg • 170 with 400 lbs / 181 kg • 102 with 700 lbs / 318 kg <p>Charging time: 2 - 4 hours</p> <p>¹ Calculated using 5Ah Packs</p>
---	--	---

Performance	400lbs (181kg)	700 lbs (318kg)	1000 lbs (454 kg)
Dimensions			
Length	7 ¾" (197 mm)	7 ¾" (197 mm)	15 ½" (394 mm)
Width	7 ¾" (197 mm)	7 ¾" (197 mm)	7 ¾" (197 mm)
Height	4 ¼" (108 mm)	4 ¼" (108 mm)	4 ¼" (108 mm)
Strap Length	84" (2134 mm)	84" (2134 mm)	84" (2134 mm)
Unit Weight	400 lbs / 181 kg version: 8 lbs / 4 kg	700 lbs / 318 kg version: 10 lbs / 5 kg	1000 lbs / 454 kg version: 20 lbs / 9 kg (Tandem Lifts)

GoTrack Configurations:

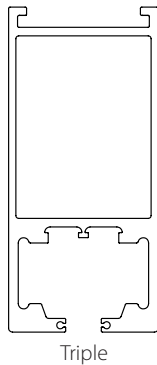

UNITY-HEALTHCARE SOLUTIONS
25967 CONIFER RD., CONIFER, CO 80421
PH: 303-838-7320 ~ Fax: 303-838-4550
<http://www.unity-healthcare.com/>

